



Horizontal Multistage Stainless Steel Pump

Pump Performance Chart

MODEL (CAST IRON)	MODEL (STAINLESS STEEL)	Power		Q	US GPM	0	22	26.4	30.9	35.1	39.6	44.1	48.3
		KW	HP		M ³ /H	0	5	6	7	8	9	10	11
					LPM	0	84	100	117	133	150	167	183
TECH-HMP8-20	TECH-HMPSS8-20	0.75	1.0	H (m)	20	19	18	17	16	15	14	12	
TECH-HMP8-30	TECH-HMPSS8-30	1.1	1.5		30	29	28	26	24	22	20	19	
TECH-HMP8-40	TECH-HMPSS8-40	1.5	2.0		40	38	36	34	32	30	28	24	
TECH-HMP8-50	TECH-HMPSS8-50	2.2	3.0		50	49	47	44	41	38	35	31	
TECH-HMP8-40T	TECH-HMPSS8-40T	1.5	2.0		40	38	36	34	32	30	28	24	
TECH-HMP8-50T	TECH-HMPSS8-50T	2.2	3.0		50	49	47	44	41	38	35	31	

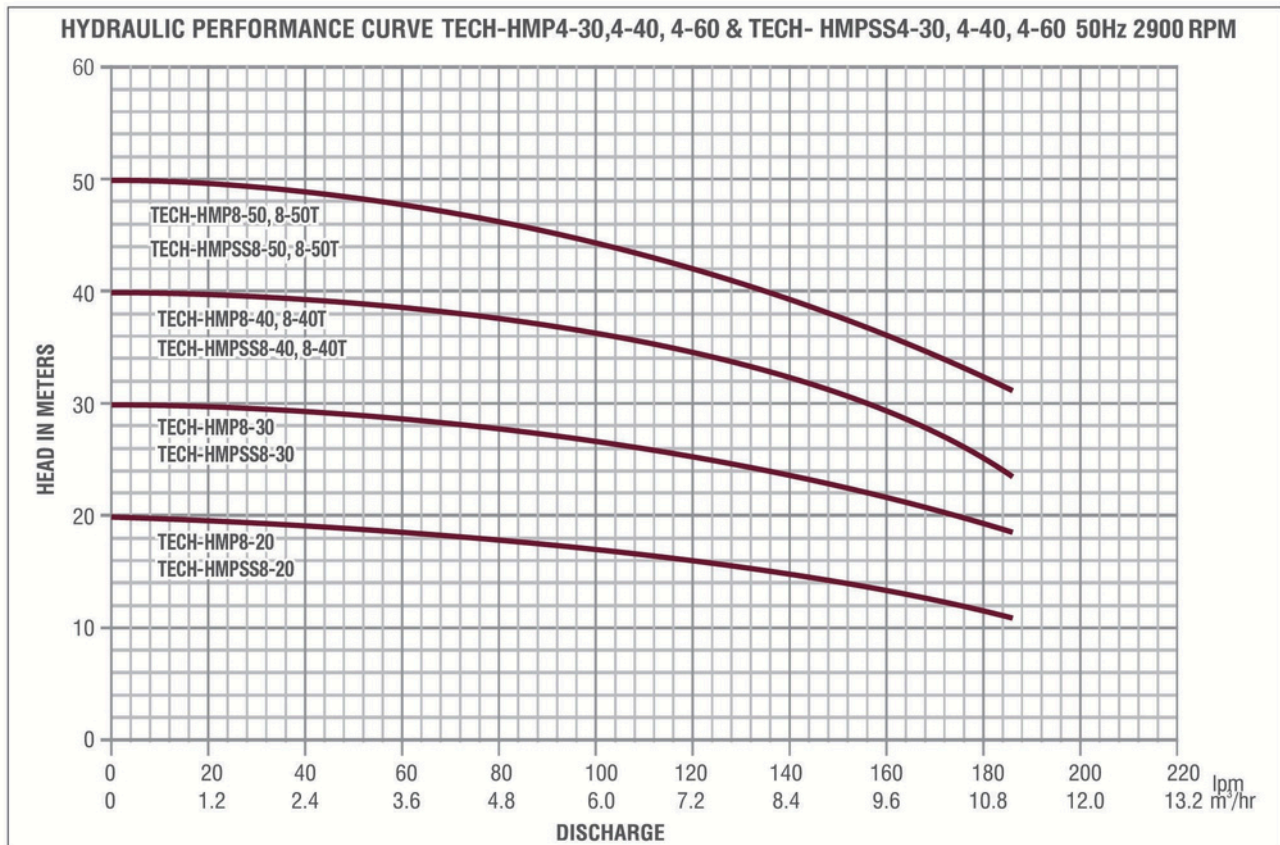

G.A. Drawing

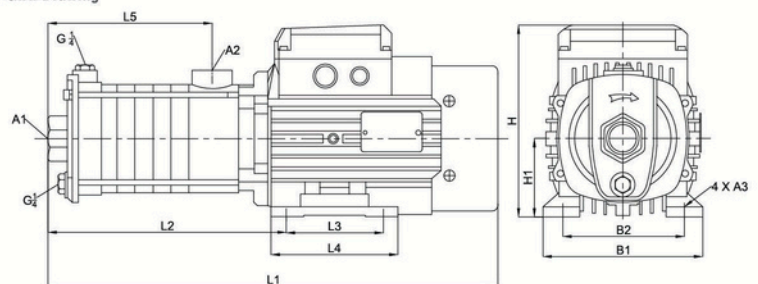

Pump Selection Chart

MODEL (CAST IRON)	MODEL (STAINLESS STEEL)	Power		PHASE	INLET/ OUTLET	Max. Flow (LPM)	Max. Head (m)	Max. Suction (m)	GW (Kg)
		KW	HP						
TECH-HMP16-10	TECH-HMPSS16-10	1.1	1.5	1 phase	2" x 2"	370	14	8	22.7
TECH-HMP16-20	TECH-HMPSS16-20	2.2	3.0				28		30.3
TECH-HMP16-30	TECH-HMPSS16-30	3.0	4.0	3 phase			42		32.2
TECH-HMP16-40	TECH-HMPSS16-40	4.0	5.5				55		39.6